



# KBL12400 12V 40Ah(10hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



## Battery Construction



Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

## Dimensions and Weight

Length(mm / inch)	197.5 / 7.78
Width(mm / inch)	165.5 / 6.52
Height(mm / inch)	170 / 6.69
Total Height(mm / inch)	170 / 6.69
Approx. Weight(Kg / lbs)	13.8 / 30.4

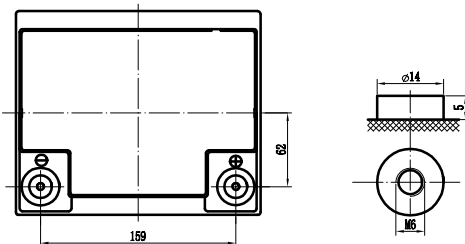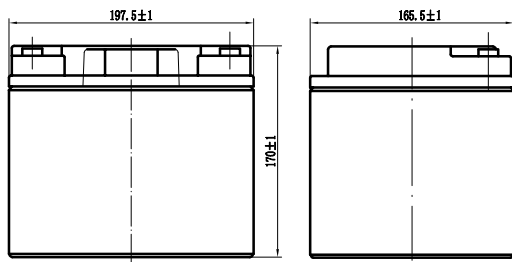

## Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	10 years
Nominal Capacity 77°F(25°C)	
10 hour rate (4.0, 10.8V)	40.0Ah
5 hour rate (6.83A, 10.5V)	34.15Ah
1 hour rate (24.9A, 9.6V)	24.9Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	9.7mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	400A(5s)
Short Circuit Current	900A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.30-2.35VPC
Maximum charging current	12A
Temperature compensation	-30mV/°C
Standby use	2.23-2.27VPC
Temperature compensation	-20mV/°C

## Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	127	86.5	70.7	39.9	24.9	10.3	7.22	4.20	2.22
1.65V	119	82.2	67.1	38.7	24.6	10.1	7.10	4.15	2.20
1.70V	109	77.8	64.5	37.3	24.2	9.89	6.97	4.10	2.18
1.75V	101	73.6	61.0	36.1	23.9	9.65	6.83	4.05	2.15
1.80V	92.9	69.9	55.2	35.8	23.5	9.43	6.66	4.00	2.11

## Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	230	158	124	81.2	60.2	49.9	27.5	21.0	14.0
1.65V	214	152	120	78.8	59.0	49.2	27.1	20.7	13.8
1.70V	198	144	117	76.3	57.8	48.3	26.6	20.3	13.6
1.75V	182	138	113	73.8	56.6	47.5	26.2	20.0	13.4
1.80V	171	130	109	71.3	55.4	46.7	25.8	19.6	13.3

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

