


RS-232 (DB9) TO RS-422 (5-PIN TERMINAL BLOCK) CONVERTER, HOUSING TYPE A (SLIM), DIN RAIL MOUNT.

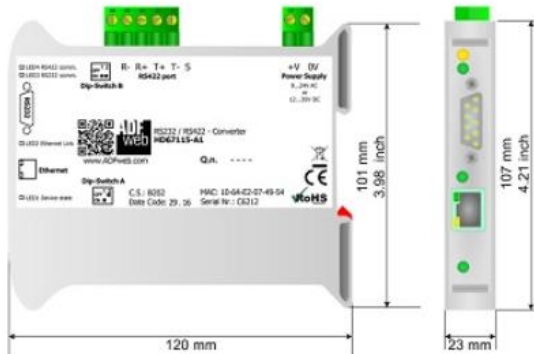

Configuration:

- Thanks to the SW67115 software on your PC you can:
- Define the parameters of RS232 line
- Define the parameters of RS422 line
- Update the device

Characteristics:

Triple isolation between RS232 - Power Supply, RS232 – RS422, RS422 - Power Supply
Bi-directional information exchange between the RS232 bus and the RS422 bus
35mm DIN rail mount

Specifications:

- Ports: 1x RS-232; 1x RS-422
- RS-422 Connector: 5way 5mm terminal block
- RS-232 Connector: D-SUB 9
- Data Rates Serial: RS-232/RS-422: Up to 115200 bps
- Power supply: 8~24VAC; 12~35VDC
- Operating temperature: -40°C/+85°C (-40°F/+185°F)
- Dimensions: 120 mm x 23 mm x 107 mm (DxWxH)
- Weight: 200g approx
- Mechanical fixing: DIN Rail mount
- Software: SW67115
- ORDER CODE: HD67115-A1

Iber3® es marca registrada de Ibergex SA de CV